


Automatic Transfer Switch (ATS)



- Powered by two separately independent power sources
- Dual power supply for redundancy
- Provides seamless power switch for IT equipment
- Preferred source selection on front panel
- Highly reliability 19" rack design (1U) to fit into a diverse working environment
- Built-in intelligent slot for SNMP or Modbus
- Built-in USB and RS-232 communications

System Configuration:

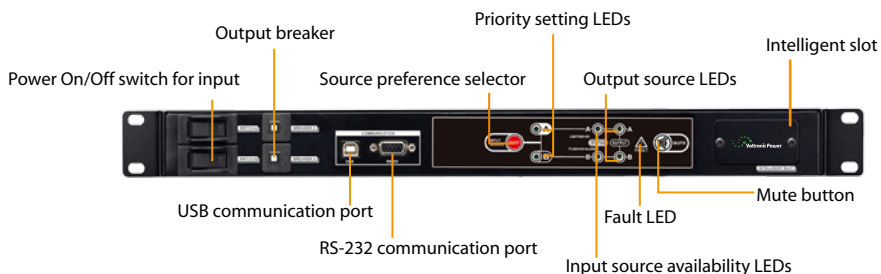

Automatic Transfer Switch Specification

MODEL	ATS-16A	ATS-30A
TOPOLOGY	Relay	Relay+SCR
INPUT		
Input Voltage	220/230/240 VAC	
Acceptable Input Voltage	180 - 258 VAC	
Input Frequency	50 Hz / 60 Hz	
Maximum Input Current	16 A	30 A
OUTPUT		
Output Voltage	220/230/240 VAC	
Maximum Output Current	10 A for IEC-C13 outlets 16 A for IEC-C19 outlet	10 A for IEC-C13 outlets 16 A for IEC-C19 outlet 30A for cable gland
CONNECTION		
Input	2 x IEC-C20 inlets	2 x cable gland
Output	8 x IEC-C13 1 x IEC-C19	4 x IEC-C13 1 x IEC-C19 1 x cable gland
Communication	USB/RS-232	
Transfer time	9-12ms (Typical) , 16ms max.	
PHYSICAL		
Dimension, D x W x H (mm)	330 x 430 x 44	
Net Weight (kgs)	5	4.5
Net Weight (including accessories) (kgs)	8	7.5
ENVIRONMENT		
Operating Temperature	0-95 % RH @ -5°C- 45°C (non-condensing)	

* Product specifications are subject to change without further notice